

CONDOR (B)



THE GENESIS AIR CONDOR IS A STANDALONE AIR PURIFIER THAT USES ADVANCED PHOTOCATALYTIC OXIDATION (PCO) TECHNOLOGY TO ELIMINATE VOCs AND VIABLE AIRBORNE MICROORGANISMS IN LARGE SPACES.



SIMPLE

Clearly defined cleaning process, easily understood design process, versatile installation, and easy to maintain.

SAFE

Third-party validation of performance on VOCs and bioaerosols, passive technology with no biproducts that could be more harmful than contaminants removed, 20+ years of success.

SUSTAINABLE

0.05" (12 Pa) of air pressure drop at 500 FPM (2.54 m/s) face velocity, low process energy consumption, sustained performance with 15-year panel life

SOLUTIONS


Valued product that meets demands of good indoor air quality and low carbon footprint.

TYPICAL APPLICATIONS

Control of MOLECULAR CONTAMINANTS including odors and VOCs found in buildings such as airports, casinos, schools, restaurants, and indoor agriculture. 4S Centerpoint is also very effective cleaning environmental tobacco smoke and wildfire smoke odors.

Inactivation of MICROORGANISMS including viruses, bacteria, mold, and fungi that challenge hospitals, schools, offices, government buildings, and prisons.

HEALTHY BUILDINGS and ENERGY REDUCTION are both possible when indoor air quality is maintained using ASHRAE Standard 62.1 Indoor Air Quality Procedure (IAQp) that allows for cleaning indoor contaminants and recirculating conditioned air instead of dilution of the contaminants with outdoor air.

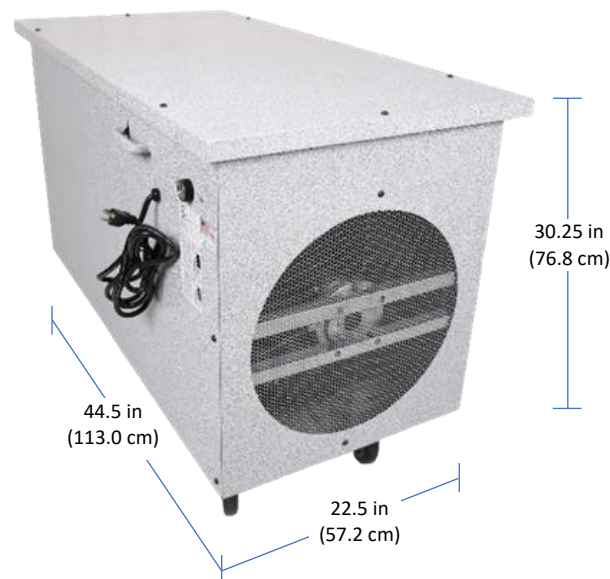

FEATURES

Casing..... 16 gauge
Paint..... Powder Coated
Filter..... 4" 20x24 MERV 13
UV Lamp Life..... 12,000 hours
Min UV Output..... 775 μ W/cm²
Fan Speed..... Adjustable
Power cord..... NEMA 5-15P, 10ft
Parts Warranty..... 12 months
Certifications..... UL 2998 Certified Zero Ozone
Casters
Lifting Handles

OPTIONAL ACCESSORIES

- ☐ Gray cabinet finish
- ☐ Custom finish
- ☐ Hinged Lid
- ☐ 16" Supply Duct Collar
- ☐ 6" 20x24 HEPA filter
- ☐ 12" 20x24 50/50 carbon blend V-Bank filter
- ☐ 6" 20x24 MERV 15

PERFORMANCE DATA

NOTE: 1.) UV output is based on end-of-life coverage of entire catalyst at 12,000 hours.

MODEL	MAX. AIRFLOW cfm (cmh)	COVERAGE AREA sq ft (m ²) (10 ft ceiling and 3 ACH assumed)	CATALYST	UV LAMP QTY	UV LAMP in (cm)	VOLTAGE	AMPS	WEIGHT lb (kg)
B1	1,625 (2,761)	3,250 (302)	1 – 2021 PCP	3			6.5	163 (73.9)
B2	1,525 (2,591)	3,050 (283)	2 – 2021 PCP	6			7.6	174 (78.9)
B3	1,450 (2,464)	2,900 (269)	3 – 2021 PCP	9	20 (50.8)	120/1/60	8.7	185 (83.9)
B4	1,375 (2,336)	2,750 (255)	4 – 2021 PCP	12			9.8	197 (89.4)