


CONDOR VERDE



THE CENTERPOINT CONDOR VERDE IS A STANDALONE AIR PURIFIER THAT USES ADVANCED PHOTOCATALYTIC OXIDATION (PCO) TECHNOLOGY TO ELIMINATE VOCs AND VIABLE AIRBORNE MICROORGANISMS.

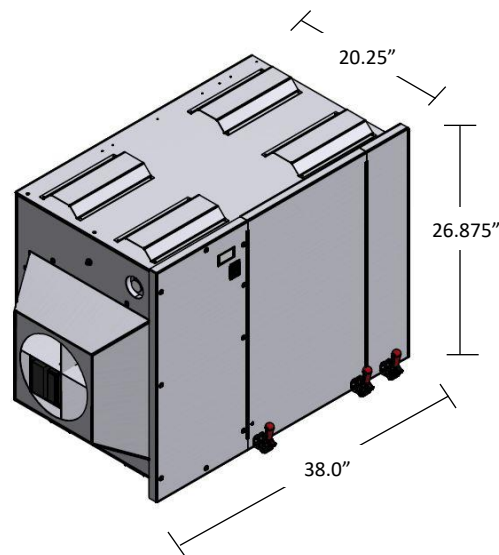

SIMPLE

Clearly defined cleaning process, easily understood design process, versatile installation, and easy to maintain.

SAFE

Third-party validation of performance on VOCs and bioaerosols, passive technology with no biproducts that could be more harmful than contaminants removed, 20+ years of success.

SUSTAINABLE

0.05" (12 Pa) of air pressure drop at 500 FPM (2.54 m/s) face velocity, low process energy consumption, sustained performance with 15-year panel life

SOLUTIONS

Valued product that meets demands of good indoor air quality and low carbon footprint.

TYPICAL APPLICATIONS

Control of MOLECULAR CONTAMINANTS including odors and VOCs found in buildings such as airports, casinos, schools, restaurants, and indoor agriculture. 4S Centerpoint is also very effective cleaning environmental tobacco smoke and wildfire smoke odors.

Inactivation of MICROORGANISMS including viruses, bacteria, mold, and fungi that challenge hospitals, schools, offices, government buildings, and prisons.

HEALTHY BUILDINGS and ENERGY REDUCTION are both possible when indoor air quality is maintained using ASHRAE Standard 62.1 Indoor Air Quality Procedure (IAQp) that allows for cleaning indoor contaminants and recirculating conditioned air instead of dilution of the contaminants with outdoor air.

FEATURES

Casing 16 gauge
Paint Powder Coated
Filter 20" x 24" x 4" Washable Filter
..... Smith Filter MECH 8 Recommended
UV Lamp Life 12,000 hours
Min UV Output 775 $\mu\text{W}/\text{cm}^2$
Power cord NEMA 5-15P, 10ft
Parts Warranty 12 months
Certifications UL 2889 Certified Zero Ozone
Long Throw Supply Nozzle
Toolless Access Lids
White Cabinet Finish

OPTIONAL ACCESSORIES

- ☐ Custom Cabinet Color
- ☐ Variable Fan Speed Control
- ☐ 208/120VAC Transformer
- ☐ 480/120VAC Transformer
- ☐ Mounting Hangers

PERFORMANCE DATA

NOTE: 1.) UV output is based on end-of-life coverage of entire catalyst at 12,000 hours.

MODEL	MAX. AIRFLOW cfm (cmh)	WASHABLE FILTER	CATALYST	UV LAMP QTY	UV LAMP in (cm)	VOLTAGE	AMPS	WEIGHT lb (kg)
Condor Verde	1200 (2039)	20" x 24" x 4"	2 – 2021 PCP	6	20 (50.8)	120/1/60	7.60	169 (76.7)